

147-123 QUANTUM®

MANSFIELD®

Elongated Front, Vitreous China, Two-Piece Toilet

FEATURES

- High performance, pressure-assist Flushmate III™ system
- 1.6 gpf / 6.0 lpf low water consumption
- Elongated front bowl
- 12" rough-in
- Model 45 chrome-plated, metal trip lever
- 2-1/8" glazed trapway
- The Mansfield® limited lifetime warranty on china, Flushmate ten-year limited warranty on vessel
- Available in White, Biscuit and Bone




MODEL 147-123

Toilet seat not included



COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS
147-123	Elongated front, pressure-assist, two-piece toilet. Less toilet seat and supply. Specify color.	
147	Elongated front, pressure-assist bowl only. Less toilet seat and supply. Specify color.	
123	Pressure-assist tank and cover only with left hand chrome-plated, metal trip lever. Less supply. Specify color.	
TANK OPTIONS		
123RH	Pressure-assist tank and cover only with right hand chrome-plated, metal trip lever. Less supply. Specify color.	
122	Pressure-assist tank and cover only with chrome-plated, plastic push button actuator. Less supply. Specify color.	
TANK TRIM & REPLACEMENT PARTS		
45	Trip lever - chrome-plated, metal trip lever, left hand	
125-LID	Tank lid	
FLUSHMATE® 503	Pressure-assist flushing system. Separate warranty applies. Contact FLUSHMATE® at 1-800-533-3460.	



147-123 QUANTUM®

MANSFIELD®

Elongated Front, Vitreous China, Two-Piece Toilet


SPECIFICATIONS

MODEL #	DESCRIPTION	CODES/STANDARDS
147-123	Elongated front (1.6 gpf / 6.0 lpf) two-piece toilet	

MATERIAL	Vitreous China	TRAP DIAMETER	2-1/8"
WATER PRESSURE RANGE	35 to 80 PSI	TRAP SEAL	2-7/8"
FLUSH SYSTEM	Flushmate III™ flushing technology	SHIPPING WEIGHT	Model 147 - 55 lbs. (25 kg) Model 123 - 43 lbs. (19.5 kg)
WATER USAGE	1.6 gpf / 6.0 lpf	WARRANTY	Vitreous China - Limited Lifetime Vessel - Limited Ten Year (Flushmate)
WATER SURFACE AREA	9-7/8" X 12-1/4"		
ROUGH-IN	12"		
MAP RATING	800 grams		

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

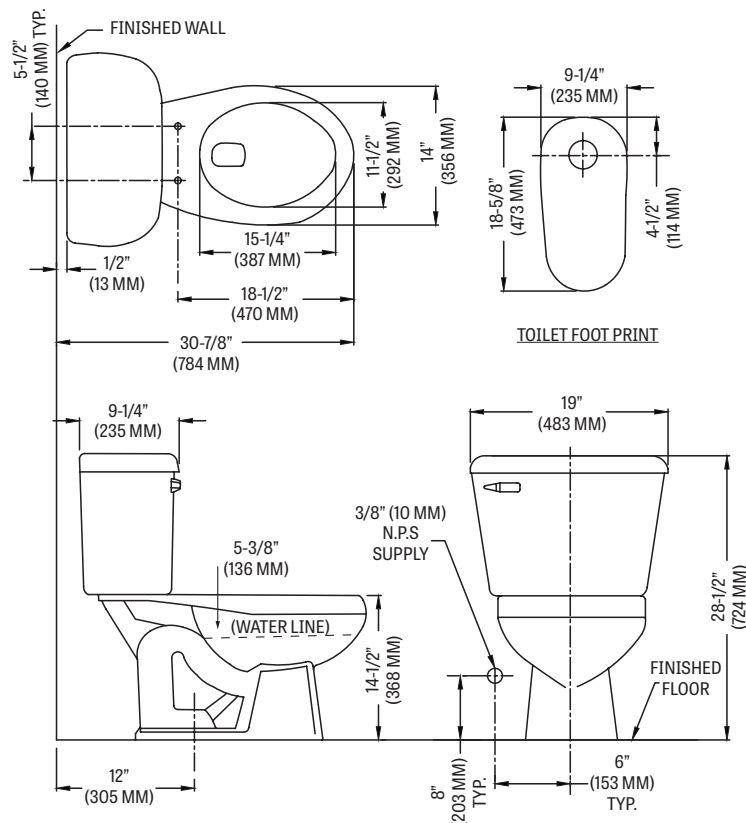

Fixture performance and specifications meet or exceed ASME A112.19.2-2013/CSA B45.1-13 standards, and other state and local codes.

